

RX45 & RX55 Scissor Lifts

Maximum productivity, minimum space

UPDATED




RX45 & RX55 Scissor Lifts


Large capacity with a small footprint

EXCLUSIVE

Best-in-class drive-on height

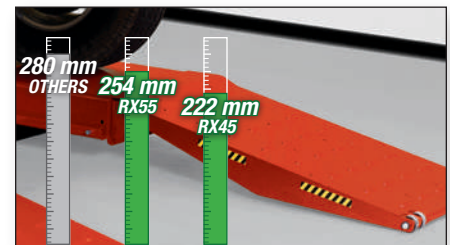

- ✓ Minimize clearance issues

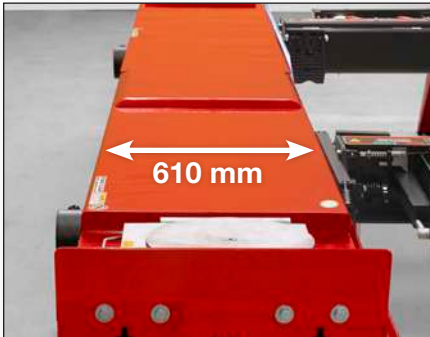

STANDARD

Wide runways

- ✓ 610 mm (24 in.) runways accept wide vehicles

OPTIONAL

Stainless steel turnplates



- ✓ Maximum corrosion resistance for long life
- ✓ Optional PowerSlide® turnplates (shown) lock/unlock automatically

STANDARD

Integrated air line



- ✓ Convenient air source for tools at front and rear

PATENTED

Sensor feedback system*



- ✓ Sensors keep runway level
- ✓ Safely stops if obstructed

STANDARD

Velocity safety fuses




- ✓ Instantaneous shutdown in event of hydraulic failure

* Shown with protective cover removed

OPTIONAL


Two Swing Air Jacks

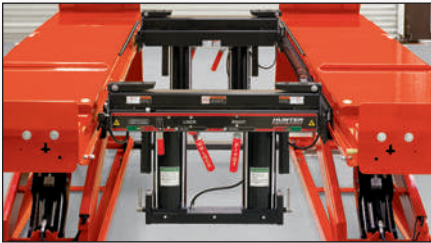

- ✓ 2720-kg (6000-lb.) capacity
- ✓ Technicians' favorite

EXCLUSIVE

Louvered ramps

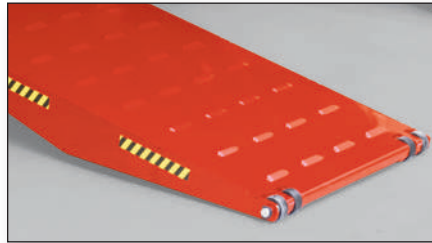

- ✓ Prevent wheel spin in wet conditions
- ✓ More effective than diamond tread or abrasive strips

PATENTED

Control panel



- ✓ Complete operation from the console
- ✓ Optional PowerSlide® Inflation Station and FIA control



RX45KLIS-435E shown with optional light kit, Swing Air Jacks, and front turnplates

STANDARD

Safety locks



- ✓ Precision-fit teeth lock runways at 16 level height positions

EXCLUSIVE

Movable work steps



- ✓ 10 secure positions
- ✓ Lightweight design

PATENTED

OPTIONAL

Inflation Station



- ✓ Automatically fills or bleeds each tire
- ✓ No dangling air lines

Exclusive features, enhanced capabilities

EXCLUSIVE

Fast descent speed

- ✓ 50% faster lowering times
- ✓ Ensures a soft landing by automatically slowing the last several inches



OPTIONAL

Swing Air Jacks

- ✓ Lift vehicles off the runways during alignment procedures and other multi-service operations
- ✓ 2720-kg (6,000-lb.) capacity
- ✓ Folding design provides lowest-profile

133-85-1 — 2720-kg (6000-lb.) Capacity Swing Air Jack

EXCLUSIVE OPTIONAL

Flush-mount installation

- ✓ Accommodate lowered vehicles or expensive spoilers
- ✓ Ideal for “showcase” shops
- ✓ Drive-thru capability

Add **F** to any RX45K or RX55K model number



EXCLUSIVE **OPTIONAL**

AlignLights system

- ✓ Bright and efficient LED light source underneath the vehicle
- ✓ Automatically turns on when the lift is raised and turns off when the lift is lowered to the floor
- ✓ AlignLights is an ALI-listed accessory

20-3438-1 — *AlignLights system*




Standard equipment

- ✓ Flush-mounted, full-floating slipplates (PowerSlide® slipplates on PS and IS models)
- ✓ Two movable work steps (not included with flush-mount installations)
- ✓ Louvered ramps with built-in wheel stops
- ✓ Front wheel stops
- ✓ Two wheel chocks
- ✓ Built-in, full-length jack rails
- ✓ Built-in air line kit

OPTIONAL

Extension kits

Approach ramp extensions




305 mm (12 in.) kit – 20-3112-1

Standard with RX55K

432 mm (17 in.) kit – 20-3113-1

Adds approximately 127 mm (5 in.)
to RX55K when substituted for 20-3112-1




1016 mm (40 in.) kit* – 20-2169-1

Adds approximately 711 mm (28 in.) to RX55K

1270 mm (50 in.) kit* – 20-2189-1

Adds approximately 965 mm (38 in.) to RX63K

Drive-thru conversion kits*

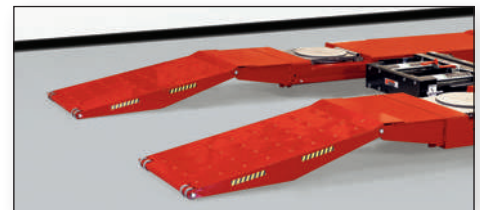

52 in. kit – 20-2498-1

For camera sensors

63 in. kit – 20-2501-1

For conventional sensors

* Quick-release pins included.

Hunter offers two fully integrated options to enhance productivity



FIA Fully Integrated Alignment

FIA allows WinAlign® aligners to control the lift features for ultimate productivity. Two patented designs offer greater flexibility and time-saving capabilities.



Shown with optional aligner console, sensors, Swing Air Jacks, front tumples, target support brackets, and lights



PATENTED

PowerSlide® edition


- ✓ Locks slipplates and turnplates with the touch of a button or automatically through an FIA-equipped aligner*
- ✓ No more struggles with lock pins
- ✓ Avoid wear and tear and extend the life of your turnplates



OPTIONAL




OPTIONAL

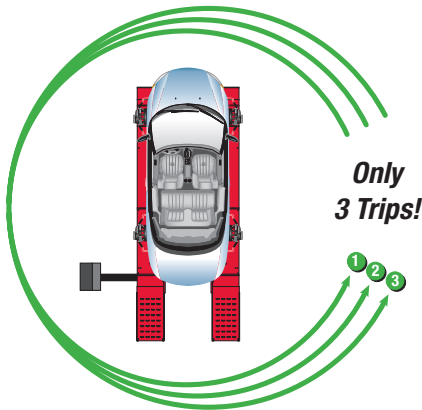

Minimize trips around the car

- 1 Mount targets
- 2 Make adjustments
- 3 Remove targets
- 4 Jack vehicle and compensate sensors
- 5 Lower leveling legs (if equipped)
- 6 Remove slipplate and turnplate pins
- 7 Replace slipplate and turnplate pins
- 8 Raise leveling legs (if equipped)


Yesterday's Technology

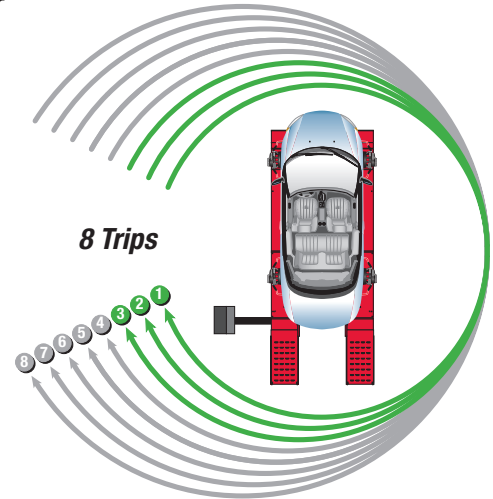

PATENTED

Inflation Station edition

- ✓ Includes PowerSlide® slipplates and turnplates
- ✓ Automatically inflate all four tires simultaneously
- ✓ Record starting and final pressure*
- ✓ Hose recoils to keep work area clear

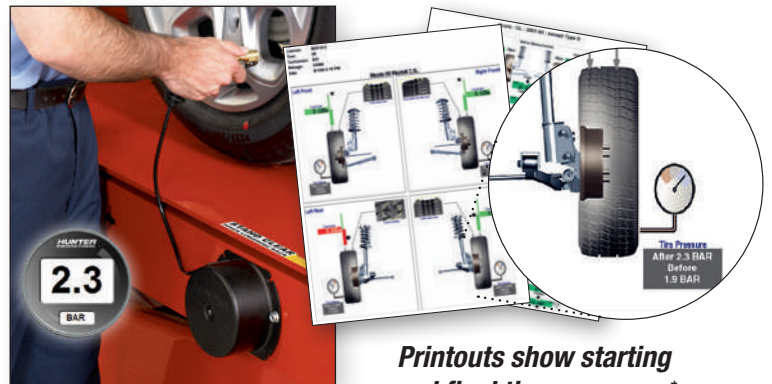

Printouts show starting and final tire pressures.*

* Requires FIA equipped aligner with WinAlign® 10.x software or greater

Specifications

	RX55K	RX45KL	RX45K
Max. vehicle weight	5500 kg (12125 lbs.)	4536 kg (10000 lbs.)	4536 kg (10000 lbs.)
Max. wheelbase	surface/flush		
General service	4673/4572 mm (184/180 in.)	4673/4572 mm (184/180 in.)	4343/4241 mm (171/167 in.)
Two-wheel alignment	4547/4445 mm (179/175 in.)	4547/4445 mm (179/175 in.)	4216/4115 mm (166/162 in.)
Four-wheel alignment	4013 mm (158 in.)	4013 mm (158 in.)	4013 mm (158 in.)
Min. four-wheel alignment	2235 mm (88 in.)	2235 mm (88 in.)	2235 mm (88 in.)
Lowered height	254 mm (10 in.)	222 mm (8.75 in.)	222 mm (8.75 in.)
Max. lifting height	1803 mm (71 in.)	1829 mm (72 in.)	1829 mm (72 in.)
Alignment height	All lock positions		
Runway width	610 mm (24 in.)		
Tread width			
Min. inside	1016 mm (40 in.)		
Max. outside	2235 mm (88 in.)		
Air pressure	6.2-10.3 bar (90-150 psi)*		
Speed	55 seconds (raise), 25 seconds (descent)		

* 8.6 bar (125 psi) required for full jack capacity

Models

	RX55KIS RX45KIS	RX55KPS RX45KPS	RX55K RX45K
Fully Integrated Alignment	✓	✓	
Inflation Station	✓		
PowerSlide® slipplates	✓	✓	
Flush-mount	Add F to any RX model number (ex. RX45K F)		
Long-deck (RX45K models only)	Add L to any RX45 model number (ex. RX45KL L S)		


Because of continuing technological advances, specifications, models and options are subject to change without notice.

PowerSlide and WinAlign are registered trademarks of Hunter Engineering Company. The PowerSlide logo is a trademark of Hunter Engineering Company.

0418AH

Copyright © 2018, Hunter Engineering Company

RX45K Plan View

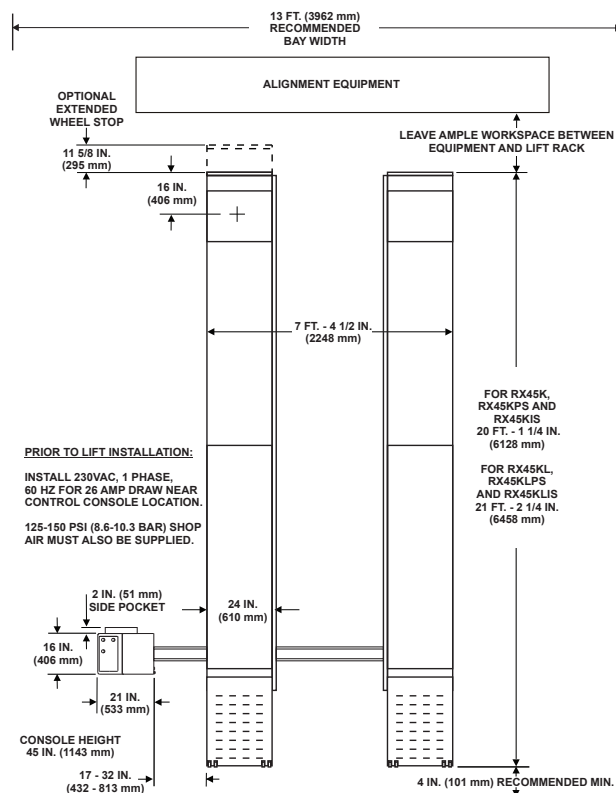

See your Hunter Sales Representative for details on site requirement.

Add one of the following suffixes to the desired model number listed to the left (ex. RX55K-**435E**):

Suffix	Power configuration
-215E	208/230V, 1PH, 50Hz
-216E	208/230V, 1PH, 60Hz
-435E	208/230/400/460V, 3PH, 50Hz

HUNTER
Engineering Company

www.hunter.com

11250 Hunter Drive, Bridgeton, MO 63044, USA
Tel: +1-314-731-3020, Fax: +1-314-731-0132
Email: international@hunter.com

Form 7472-TE-05, 04/18